







**LUX NERO - 300 MM - ZWART**

**SKU 933120**

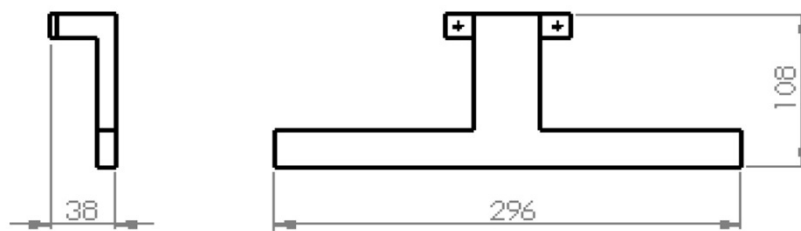


 sku 933120

 Deze armatuur bevat ingebouwde LED-lampen.

 } LED

In de armatuur kunnen de lampen niet worden vervangen.

874/2012 

12.2018

Afmetingen en assortiment kunnen worden gewijzigd zonder voorafgaandelijk bericht


F933120N





## LUX NERO - 300 MM - ZWART

SKU 933120

Type verlichting	LED verlichting
Type bevestiging	Op spiegelkast of op spiegelpaneel
Uitvoering	Lengte 300 mm
Materiaal	Kunststof
Watt	4.4W
Kelvin	4000 K
Lumen	215 Lumen
Volt	220-240V
IP waarde	IP44
Lengte aansluitsnoer	300 mm
Transfo	Rechtstreeks op het net – geen transfo nodig
Garantie	5 jaar

 The CE mark indicates that the product is conforming and satisfies all the community directives that are applicable; it guarantees the right of this product to be freely commercialized in all the states members of the European Union.

 Insulation degree II: Appliances in which electric shock protection is provided, in addition to the basic insulation, by further or reinforced insulation (also known as double insulation). In this case, the appliance does not need to be connected to the mains.

 Protection degree F: Appliances bearing the F symbol may be installed directly on normally inflammable surfaces. Normally inflammable surfaces are defined as surfaces made from materials such as wood or wood derivatives and which are more than 2 mm thick.

**IP44** Protection degree IP44: Protected against solid objects greater than 1 mm. Protected against splashing water.

 Inside use.