

## INSTALLATION DIRECTIONS


### I:INSTALLATION WARNINGS:

- 1) Design the concealed pipes as per Installation Directions.
- 2) The installation locations should be install drain waste.
- 3) It should be installed after decorating the house(because the paint will corrupt faucet's finish)
- 4) Clean the pipe system before install the faucet.
- 5) Please fasten the adhesive tap in the thread part if need(note:if the pipe thread can not be matched ,please check the thread standard firstly and don't fasten it which can avoid destroying fittings.
- 6) After installation, Please check the fastness of pipe connector.Open and close the water switch several time to check the leakage of every pipe connector.Please confirm it is normal before using it .
- 7) Please bring this direction to final customer.

### II.USE AND MAINTENANCE:

- 1) The water pressure should between 0.05Mpa and 1.0Mpa,the water temperature should between 0°C and 90°C
- 2) Don't hang the organism on the faucet.
- 3) Don't forget close the faucet after using.
- 4) Please often clean the finish of faucet(please use neutral scour)and clean it with soft towel .
- 5) Please adopt prevent frostbite measure if the room is under 0°C which can avoid freezing the faucet.
- 6) Before having a shower or washing hand, please turn on the cold water firstly and turn on the hot water then,adjust the best water temperaturure ,avoid scalding the hand.
- 7) No profesional people,please don't dismantle this faucet which can avoid destroying the fittings.

## INSTALLATION SHOW

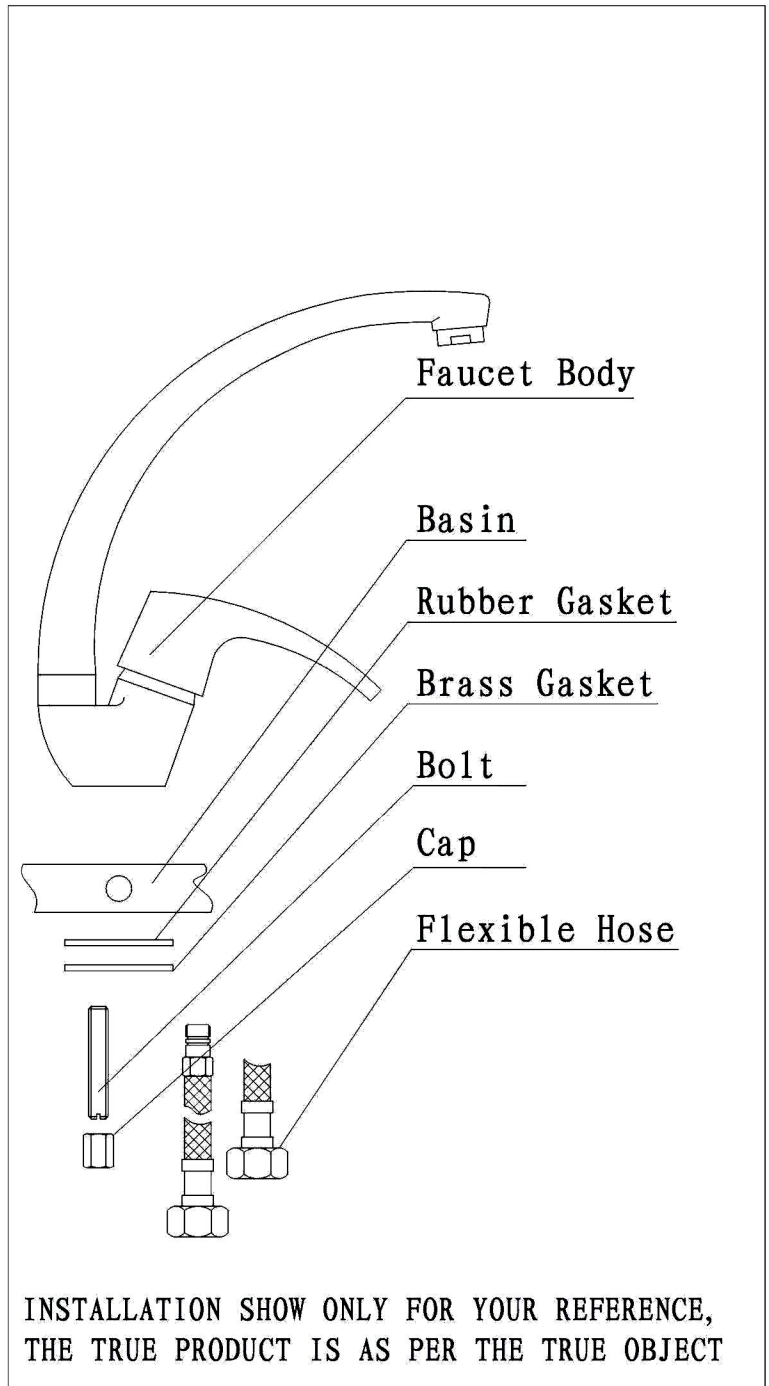

### III.INSTALLATION APPROACH:

- 1) Please connect the flexible hose and bolts on bottom of faucet body.
- 2) Insert the decorative plate(if need) ,insert the hole of basin or bidet,fasten faucet with rubber gasket ,brass gasket .
- 3) Connect the inlet water with triangular vlave ,please beware of "left cold"and "right hot"
- 4) Connctet the water switch,turn on the faucet handle , make sure it can be used normally.